

ADSL2+ WLAN Router SL2-141 / SL2-141-I

Broadband



Surf the internet, do emails and run multimedia at DSL Speed. On several computers all at the same time - save through the builtin firewall.



USB slave port to connect an additional computer to the home network.



4 Ethernet ports for comfortable home networking.




Modern WLAN standard guarantees secure wireless internet and networking access.

The SIEMENS SL2-141 WLAN Router integrates a ADSL2+ modem, router, firewall and 4 Port Ethernet Switch in one device. Data access is provided via Wireless Lan high speed 802.11b/g or wired option via 4 port Ethernet or USB.

Security is supported via a double Stateful Packet Inspection, NAT based firewall and Hardware accelerated AES/WEP/WPA/WPA2 based encryption/MAC Address Filtering for Wireless links. VPN Passthrough and DMZ support provides additional security support for telecommuters as well as allow flexibility while maintaining security against malicious hackers.

With Universal Plug and Play (UPnP) support, home networking becomes a breeze for everyone in the family. Multi Port Range/Popular Application Forwarding makes it even easier to select which application you want your network to allow while ensuring your security at the same time.

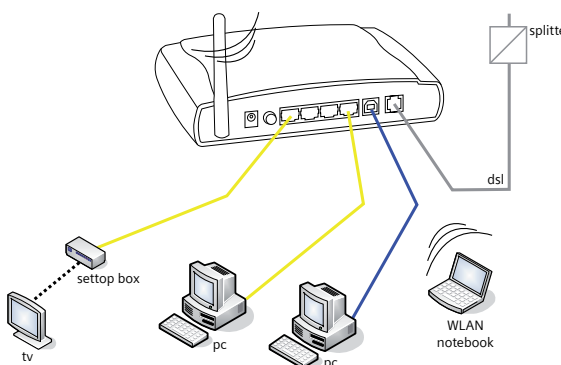

SOFTWARE

ADSL Compliance

- ANSI T1.413 Issue 2
- ITU G.992.1 Annex A (G.dmt)
- ITU G.992.1 Annex B (G.dmt) with UR2 compliant
- ITU G.992.2 Annex A (G.lite)
- ITU G.994.1 (G.hs)
- Support dying gasp
- Maximum Rate: 8 Mbps for downstream and 1 Mbps for upstream

ADSL2 Compliance

- ITU G.992.3 Annex A and Annex B (G.dmt.bis)
- Support dying gasp
- Maximum Rate: 12 Mbps for downstream and 1 Mbps for upstream
- ITU G.992.3 Annex L
- ITU G.992.3 Annex M

ADSL2+ Compliance

- ITU G.992.5 Annex A and Annex B
- Support dying gasp
- Maximum Rate: 24 Mbps for downstream and 1.2 Mbps for upstream
- ITU G.992.5 Annex M

Wireless LAN Compliance

- IEEE 802.11g and IEEE 802.11b
- Data Rate: 54, 48, 36, 24, 18, 12, 9, 6 Mbps for 802.11g; 11, 5.5, 2, 1 Mbps for 802.11b
- Modulation Technique: OFDM for 802.11g; CCK (11 Mbps, 5.5 Mbps) for 802.11b; DQPSK (2Mbps) for 802.11b; DBPSK (1 Mbps) for 802.11b
- Operating Frequency: 2.4 ~ 2.5 GHz
- Operating Channels: depending on local regulations. For example, 11Channels (Northern America), 13 Channels (Europe), and 14 Channels (Japan)
- Support the selection of best quality channel automatically
- RF Transmitter
 - Output Power (EIP):
 - 13.5 dBm (22mW) for 802.11g,
 - 17.5 dBm (56mW) for 802.11b
 - TX Spectrum Mask: comply with IEEE802.11 b/g standard
- RF Receiver
 - Sensitivity: comply with IEEE802.11 b/g standard
 - External and internal Antenna: Hardware diversity support
- Coverage Area: 300 meters (LOS)
- Support security standards
- WEP RC4 with 64-bit or 128-bit key length
- WPA/WPA-PSK or MIXED Mode
- WPA2/WPA2-PSK or MIXED Mode
- 802.1x
- Support the Access Control function: only registered WLAN clients are allowed to associate to this device.
- SSID can be hidden for the security issue
- Two SSIDs are supported. The two wireless networks can be configured in different wireless security level.
- Support the Repeater function to extend the coverage area
- Support wireless user isolation for the hotspot

ATM Features

- Compliant to ATM Forum UNI 3.1 / 4.0 Permanent Virtual Circuits (PVCs)
- Support up to 16 PVCs for UBR, CBR, VBR-nrt, VBR-rt with traffic shaping
- RFC2684 LLC Encapsulation and VC Multiplexing over AAL5
- RFC2364 Point-to-Point Protocol (PPP) over AAL5
- RFC2225 Classical IP and ARP over ATM
- RFC2516 PPP over Ethernet: support Relay (Transparent Forwarding) and Client functions
- Support PPPoE, PPPoA, MER and Bridged mode
- OAM F4/F5 End-to-End/Segment Loopback Cells

Bridging Features

- Supports self-learning bridge specified in IEEE 802.1d
- Transparent Bridging
 - Supports up to 4096 learning MAC addresses
- Transparent Bridging among 10/100 Mb Ethernet, USB and 802.11g wireless LAN
- Supports IGMP Snooping
- Supports 802.1Q VLAN packet pass-through

Routing Features

- NAT (Network Address Translation) / PAT (Port Address Translation) let multiple users on the LAN to access the Internet for the cost of only one IP address.
- ALGs (Application Level Gateways): such as NetMeeting, MSN Messenger, FTP, Quick Time, mIRC, Real Player, CuSeeMe, VPN pass-through with multiple sessions, L2 TP & IPsec, RTSP, SIP, etc.
- Port Forwarding: the users can setup multiple virtual servers (e.g., Web, FTP, Mail servers) on user's local network.
- Support DMZ
- UPnP IGD (Internet Gateway Device)
- UPnP extension for NAT traversal capability
- Static routes, RFC1058 RIPv1, and RFC1723 RIPv2
- DNS Relay
- Dynamic DNS
- DHCP Client/Relay/Server
- Time protocol can be used to get current time from network time server.
- Support IGMP Proxy
- Support IP/Bridge QoS for prioritize the transmission of different traffic classes
- Support port mapping function which allows you to assign all data traffic transmitted among specific Internet connections and LAN ports
- Support 802.1Q VLAN Tagging

Security Features

- PAP (RFC1334), CHAP (RFC1994), and MS-CHAP/MSCHAP2 for PPP session
- Firewall support IP packets filtering based on IP address/Port number/Protocol type
- Support DoS (Deny of Services) which detect & protect a number of attacks (such as SYN/FIN/RST Flood, Smurf, WinNuke, Echo Scan, Xmas Tree Scan, etc)

Configuration and Management

- User-friendly embedded web configuration interface with password protection in English or German
- Remote management access control
- Telnet session for local or remote management
- Firmware upgrades through HTTP, TFTP, or FTP
- Configuration file backup and restore
- Support TR-069

Hardware

Interface

- One RJ-11 port for PSTN ADSL connection
- Four RJ-45 ports for IEEE 802.3/802.3u 10/100 Base-T auto-sensing and auto-crossover Ethernet connection
- One USB client port compliant to USB 1.1
- IEEE 802.11b/g wireless LAN
- One power On/Off button
- One hidden button for restoration of factory default settings
- Regulatory Approvals and Compliance
 - EMC: FCC part 15 Class B, CE
 - Telecom: FCC part 68
 - Safety: UL, CB, LVD

Power Requirement and Operation Environment Requirement

- Power Adaptor: Input 120±10 or 230±10 VAC; Output 12VAC, 1.0A
- Power Consumption: less than 10 Watt
- Ambient Temperature: 0 to 40°C (32 to 96°F)
- Relative Humidity: 20% to 90% (non-condensing)

Physical

- Front Panel: 9 leds

Dimensions

- Housing: 190 mm (L) x 130 mm (W) x 40 mm (H)
- Weight: 345 g

Ordering Number

- ADSL SL2-141 (Annex A): S1621-Z121-A (EAN Code: 40 255 15 22154 8)
- ADSL SL2-141-I (Annex B): S1621-Z120-A (EAN Code: 40 255 15 22153 1)

Albis Technologies Ltd
Albisriederstrasse 199
CH-8047 Zürich
Phone +41 58 252 4777
Fax +41 58 252 47 78
www.albistechnologies.com